Vera

PBS | LVD | EMC | IP66 | IK08

LED A A+ A++

CRI 70 | CRI 80

0° | 0°

White | Light Grey | Textured Metalic Dark Grey | Black

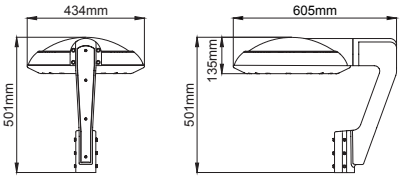



EN

– Street lighting system for use with LEDs.
– Corrosion resistant die-cast aluminium body.
– Silicon gasket.
– All exterior parts are stainless steel.
– Tempered safety glass.
– Optionally 10KV surge protector can be integrated.
– Mains voltage: 220-240V / 50-60Hz.
– Clever thermal design.
– High visual comfort.
– Colour tolerance max. 3 SDCM.
– Recomended mounting height up to 8mt.
– High performance optics suitable for streetlighting standards.
– Pole-top installation on poles with ending part from Ø42 to Ø63mm.
– High efficiency up to 150lm/W.
– Astro dim dimming option available upon request.
– Motion sensor can be integrated optionally.
– Apart from standart 4000K, 2700K, 3000K, 3500K and 5000K CCT options are also available.

TR

– LED'li sokak aydınlatma armatürü.
– Korozyona dayanıklı aluminyum enjeksiyon gövde.
– Silikon contalı.
– Dışarda kalan tüm metal parçalar paslanmaz çelikten.
– Tamperli cam.
– 10KV gücünde gerilim koruyucu entegre edilebilir.
– 220-240V / 50-60Hz enerji girişli.
– Akıllı soğutma tasarımı.
– Yüksek aydınlatma konforu.
– Renk toleransı max. 3 SDCM.
– 8mt direk yüksekliğine kadar kullanımı uygundur.
– Sokak aydınlatma standardlarına uygun verimli optik yapı.
– Konsol iç çapı Ø42 - Ø63mm arası uyumludur.
– 150lm/W'a kadar ulaşan verimli yapı.
– Astro dim seçeneği mevcuttur.
– Alternatif olarak hareket sensörü entegre edilebilir.
– Standart 4000K ışık renginin yanında alternatif olarak 2700K, 3000K, 3500K ve 5000K seçenekleri de mevcuttur.