

Asteroid Maxi ST






PBS LVD EMC CE PC IP66 IK08

LED A A+ A++

CRI 70 CRI 80

0° 0°

White Light Grey Textured Metallic Dark Grey Black

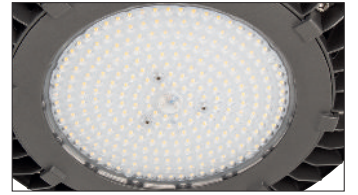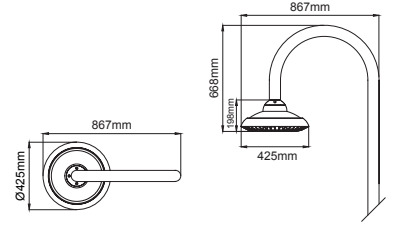

EN

- Street lighting system for use with LEDs.
- Corrosion resistant die-cast aluminium body.
- Silicon gasket.
- All exterior parts are stainless steel.
- Tempered safety glass.
- Optionally 10KV surge protector can be integrated.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- High visual comfort.
- Colour tolerance max. 3 SDCM.
- Recommended mounting height up to 8mt.
- High performance optics suitable for streetlighting standards.
- Pole-top installation on poles with ending part from Ø42 to Ø63mm.
- High efficiency up to 150lm/W.
- Astro dim dimming option available upon request.
- Motion sensor can be integrated optionally.
- Apart from standart 4000K, 2700K, 3000K, 3500K and 5000K CCT options are also available.

TR

- LED'li sokak aydınlatma armatürü.
- Korozyona dayanıklı alüminyum enjeksiyon gövde.
- Silikon contalı.
- Dışarda kalan tüm metal parçalar paslanmaz çelikten.
- Tamperli cam.
- 10KV gücünde gerilim koruyucu entegre edilebilir.
- 220-240V / 50-60Hz enerji girişi.
- Akıllı soğutma tasarımı.
- Yüksek aydınlatma konforu.
- Renk toleransı max. 3 SDCM.
- 8mt direk yüksekliğine kadar kullanımı uygundur.
- Sokak aydınlatma standartlarına uygun verimli optik yapı.
- Konsol iç çapı Ø42 - Ø63mm arası uyumludur.
- 150lm/W'a kadar ulaşan verimli yapı.
- Astro dim seçeneği mevcuttur.
- Alternatif olarak hareket sensörü entegre edilebilir.
- Standart 4000K ışık renginin yanında alternatif olarak 2700K, 3000K, 3500K ve 5000K seçenekleri de mevcuttur.