

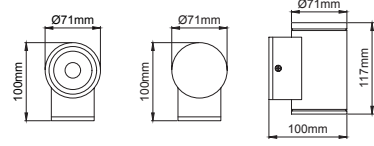
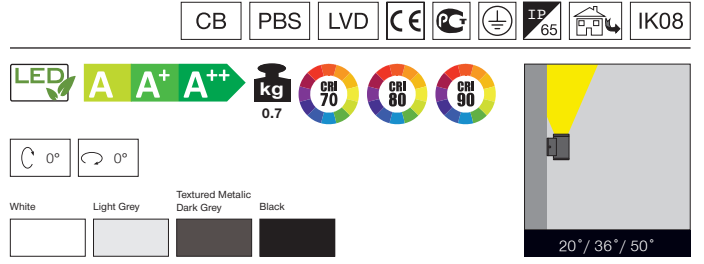
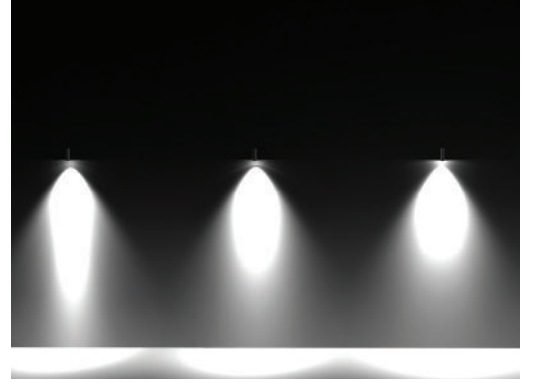


Koala Mini

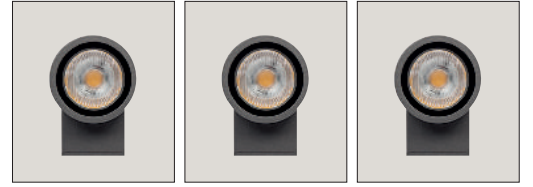

Koala Mini / 007.WA.06045

| | | |
|---|----------|------|
| Code / Kod | WA.06045 | |
| System Power / Sistem Gücü | 14W | |
| Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80 | 2700K | 1650 |
| | 3000K | 1680 |
| | 3500K | 1715 |
| | 4000K | 1750 |
| | 5000K | 1800 |
| Driving Current / Sürüş Akımı | 350mA | |
| Dali Dimming Option / Dali Dim Seçeneği | ✓ | |
| 1-10V Dimming Option / 1-10V Dim Seçeneği | ✓ | |

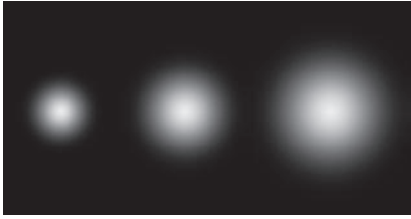

EN

- Corrosion resistant die cast aluminium alloy.
- Installation with bracket on walls.
- Mains voltage: 220-240V / 50-60Hz.
- Spot, medium, wide and wide flood beam angles available.
- Convenient to be used with COB led.
- Led colour temperatures are optionally 2700K, 3000K, 3500K, 4000K and 5000K.
- Thermal shock resistant safety glass.
- Weatherproof and durable silicone rubber gasket.
- Ultraviolet stabilized polyester powder coat finish in white, black, dark gray and light gray finish.
- Luminaire can be installed in any burning position.
- Double layer polyester powder paint resistant to corrosion and salt spray fog.
- All external screws are stainless steel.
- High colour consistency: <3 SDCM
- Up to 125lm/W efficiency.

TR

- Korozyona dayanıklı alüminyum gövde.
- Duvara braketli montaj sistemine sahiptir.
- 220-240V / 50-60Hz enerji girişi.
- Dar, orta, geniş ve çok geniş açı seçenekleri mevcuttur.
- COB Led ile kullanıma uygundur.
- 2700K, 3000K, 3500K, 4000K ve 5000K renk sıcaklığı seçenekleri mevcuttur.
- Termal şoka dayanıklı temperli cam.
- Su geçirmezliği sağlayan silikon conta.
- Ultraviyole ışımaya dayanıklı beyaz, açık gri, antrasit gri ve siyah elektrostatik toz boyalı.
- Armatür aşağı veya yukarı bakacak şekilde istenildiği gibi monte edilebilir.
- Çift katmanlı polyester toz boya sayesinde korozyona ve tuza dayanıklı gövde.
- Tüm dış civatalar paslanmaz çelik.
- Yüksek LED renk uyumu: <3 SDCM
- 125lm/W'a kadar ulaşan verim.