

SİLİNDİR ZOOM Tracklight



SİLİNDİR ZOOM is a multifunctional spotlight that integrates both beam control, CCT control and brightness control on single compact housing. Two different dimension option with different lumen package available on this range.

CCT options are 2700K, 3000K and 4000K that are most widely used options in retail. Dimming possible from 0% to 100% and beam control from 15° to 50°.

SİLİNDİR Zoom serisi hem ışık açısı, ışık tonu ve ışık seviyesinin ayarlanabildiği mükemmel bir teknik tasarıma sahiptir. Tüm bu özelliklerin görece küçük bir kasada birleştiği bu seri, iki farklı boy seçeneğine sahiptir.

Işık ton ayar seçenekleri 2700K, 3000K ve 4000K olup mağazacılık vb birçok projenin büyük bir kısmına cevap verebilir. Işığın kısma ayar aralığı %0'dan %100'e kadardır. Açık kontrolü 15° ile 50° derece arasında yapılabilir.

EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- With 3-phase universal track adaptor.
- 90° rotation on vertical and 350° angle on horizontal axis with mechanical aiming lock.
- Phase DIM option available with dimmer mounted on the backside of the spotlight.
- Super Spot, Spot, Medium, Flood and Wide Flood beam angle options available with rotationally symmetric light distribution through adjustable lens optic.
- CCT control possible through dip-switch on the backside of the spotlight.
- Standart CRI>80 and CRI>90 high options available.
- Up to 87lm/W efficiency.
- High colour consistency: <3 SDCM

TR




- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji girişli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- 3-Fazlı üniversal ray adaptörlü.
- Dikeyde 90°, yatayda 350° hareket kabiliyetine sahip mekanik kilitlemeli mafsalsistemi.
- Armatürün arka kısmında yer alan dimmer sayesinde FAZ DIM özelliğine sahiptir.
- Çok Dar, Dar, Orta, Geniş ve Çok Geniş reflektör açı seçenekleri mevcuttur.
- Armatür arka kısmında yer alan anahtar sayesinde ışık Kelvin'i ayarlanabilir.
- Standart CRI>80 ve yüksek CRI>90 LED seçenekleri mevcuttur.
- 87lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM

Silindir Zoom

CCT Control with Switch / Switch ile Renk Ayarı

We are optionally able to control CCT of the Silindir Zoom Tracklight range with switch available at the backside of the fixture with 3000K, 3500K and 4000K light output options from same spotlight.

Silindir Zoom Rayspot armatür serisinde ışık rengi armatürün arka kısmında bulunan buton sayesinde 3000K, 3500K ve 4000K olarak ayarlanabilmektedir.

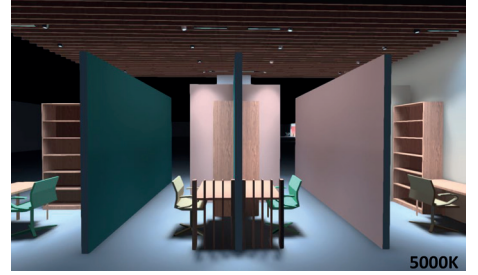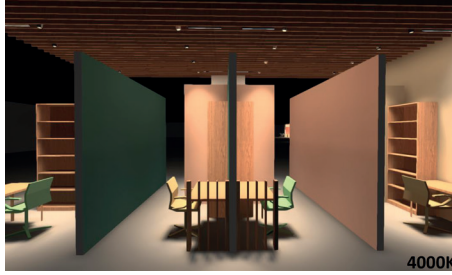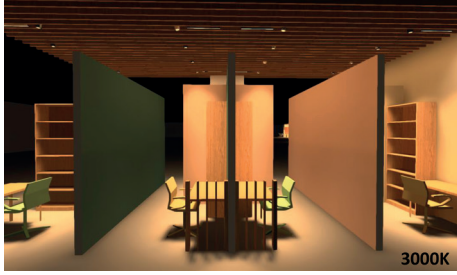

Phase DIM / Faz DIM

Avolux offers easy DIM control on its Silindir Zoom range with a dimmer mounted on the backside of the tracklight.

Avolux Silindir Zoom serisinde armatürün arka kısmında yer alan anahtar ile kolay DIM seçeneği sunar.



Beam Control / Açık Kontrolü

Avolux provides beam control with Silindir Zoom Tracklights with special mechanism on spotlight integrated with customized lens. Adjustment from 15° to 50° possible.


Avolux Silindir Zoom serisindeki özel mekanizma ve lens sayesinde 15° den 50° ye kadar açı kontrol olanağı sağlar.




Silindir Zoom Maxi



3 / Product Color / Ürün Renk

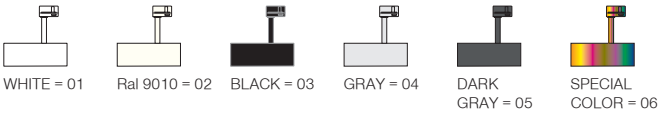


Reflector Angle / Reflektör Açısı

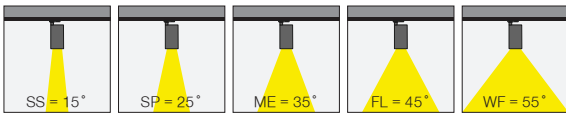

* See page 169 for ldt files. / Işık eğrileri için sayfa 169 bakınız.

Technical Drawing / Teknik Çizim

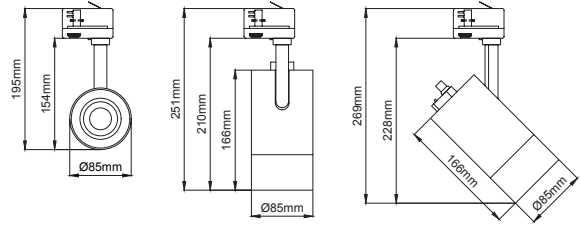

Silindir Zoom Maxi / I01.MLT.18950



* Code example / Kod örneği:

I01.MLT.18950 . 25 . 01

1- Product code / Armatür kodu

2- Power / Güç

3- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
25W	CRI>80	I01.MLT.18950 . (..) . (...) . (..) . (..)	2700K	1600
			3000K	1700
			3500K	1800
			4000K	2000
			5000K	X
	CRI>90		2700K	1724
			3000K	1830
			3500K	1935
			4000K	2164
			5000K	X
CRI>98	I01.MLT.18950 . (..) . (...) . (..) . (..)	2700K	X	
		3000K	X	
		4000K	X	


2	Watt - Driving Current / Watt - Sürüş Akımı	CRI / Kelvin	Reflector Angle / Reflektör Açısı	3	Product Color / Ürün Renk
25	25W - 600mA	827 CRI>80 - 2700K	SS 15° - Super Spot	01 white 02 ral 9010 03 black 04 gray 05 dark gray 06 special color	
		830 CRI>80 - 3000K	SP 25° - Spot		
		835 CRI>80 - 3500K	ME 35° - Medium		
		840 CRI>80 - 4000K	FL 45° - Flood		
		927 CRI>90 - 2700K	WF 55° - Wide Flood		
		930 CRI>90 - 3000K			
		935 CRI>90 - 3500K			
		940 CRI>90 - 4000K			

Silindir Zoom Midi




COB Led Tracklight Series / COB Led Rayspot Serisi


3 / Product Color / Ürün Renk

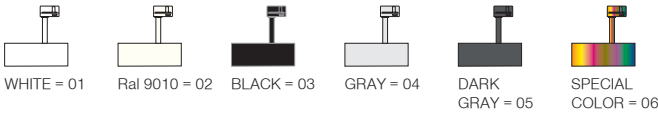

Reflector Angle / Reflektör Açısı

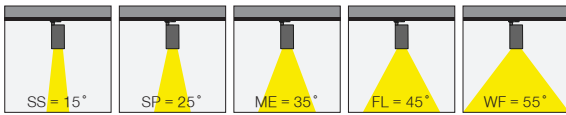

Technical Drawing / Teknik Çizim

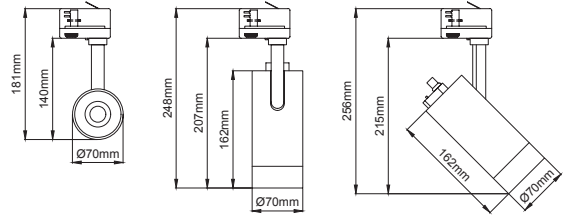

* See page 169 for ldt files. / Işık eğrileri için sayfa 169 bakınız.

Silindir Zoom Midi / I01.MLT.18955



* Code example / Kod örneği:

I01.MLT.18955 . 15 . 01

1 2 3

1- Product code / Armatür kodu

2- Power / Güç

3- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
15W	CRI>80	I01.MLT.18187 . (..) . (...) . (..) . (..)	2700K	805
			3000K	824
			3500K	845
			4000K	1000
			5000K	X
15W	CRI>90	I01.MLT.18187 . (..) . (...) . (..) . (..)	2700K	752
			3000K	770
			3500K	788
			4000K	933
			5000K	X
15W	CRI>98	I01.MLT.18187 . (..) . (...) . (..) . (..)	2700K	X
			3000K	X
			4000K	X

2	Watt - Driving Current / Watt - Sürüş Akımı	CRI / Kelvin	Reflector Angle / Reflektör Açısı	3	Product Color / Ürün Renk	
15	15W - 350mA	827	CRI>80 - 2700K	927	CRI>90 - 2700K	01 white 02 ral 9010 03 black 04 gray 05 dark gray 06 special color
		830	CRI>80 - 3000K	930	CRI>90 - 3000K	
		835	CRI>80 - 3500K	935	CRI>90 - 3500K	
		840	CRI>80 - 4000K	940	CRI>90 - 4000K	
		SS	15° - Super Spot	SP	25° - Spot	
		ME	35° - Medium	FL	45° - Flood	
		WF	55° - Wide Flood			