
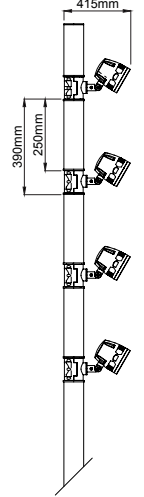



# Multi Panda ST



## Multi Panda ST / 007.ST.05212

| LED   | Power LED |        |
|---|-----------|--------|
| System Power / Sistem Gücü                                    | 2x36W     |        |
| Lumen Output from Fixture<br>/ Armatür Çıkış Lümeni<br>CRI>80 | 2700K     | 2x3935 |
|   | 3000K     | 2x4090 |
|   | 3500K     | 2x4175 |
|   | 4000K     | 2x4260 |
|   | 6000K     | 2x4475 |
| Driving Current / Sürüş Akımı                                 | 600mA     |        |
| Dali Dimming Option / Dali Dim Seçeneği                       | ✓         |        |

## Multi Panda ST / 007.ST.05213

| LED   | Power LED |        |
|---|-----------|--------|
| System Power / Sistem Gücü                                    | 3x36W     |        |
| Lumen Output from Fixture<br>/ Armatür Çıkış Lümeni<br>CRI>80 | 2700K     | 3x3935 |
|   | 3000K     | 3x4090 |
|   | 3500K     | 3x4175 |
|   | 4000K     | 3x4260 |
|   | 6000K     | 3x4475 |
| Driving Current / Sürüş Akımı                                 | 600mA     |        |
| Dali Dimming Option / Dali Dim Seçeneği                       | ✓         |        |

## Multi Panda ST / 007.ST.05214

| LED   | Power LED |        |
|---|-----------|--------|
| System Power / Sistem Gücü                                    | 4x36W     |        |
| Lumen Output from Fixture<br>/ Armatür Çıkış Lümeni<br>CRI>80 | 2700K     | 4x3935 |
|   | 3000K     | 4x4090 |
|   | 3500K     | 4x4175 |
|   | 4000K     | 4x4260 |
|   | 6000K     | 4x4475 |
| Driving Current / Sürüş Akımı                                 | 600mA     |        |
| Dali Dimming Option / Dali Dim Seçeneği                       | ✓         |        |